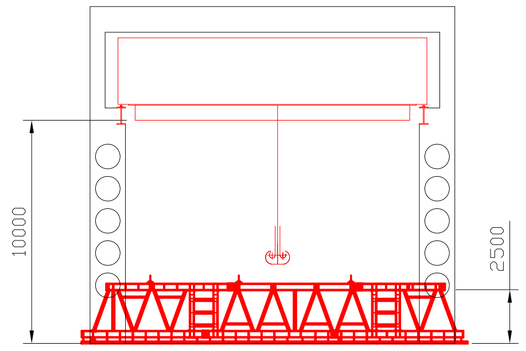

SECTION A-A

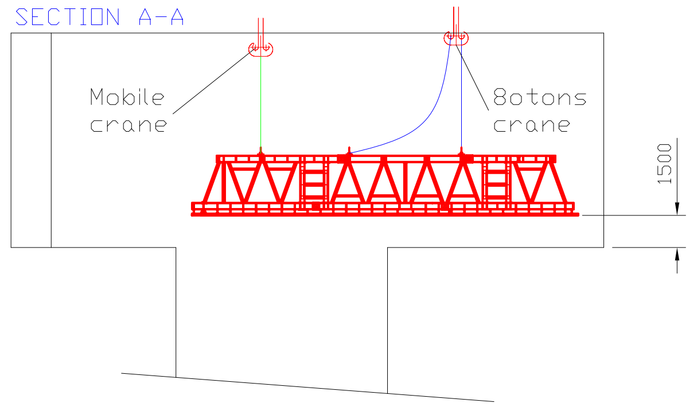

SECTION B-B

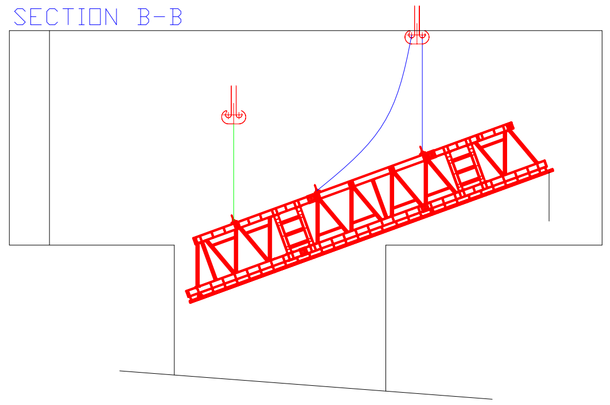

SECTION C-C

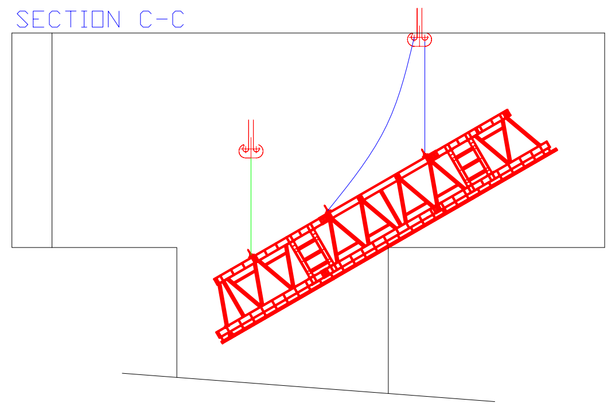

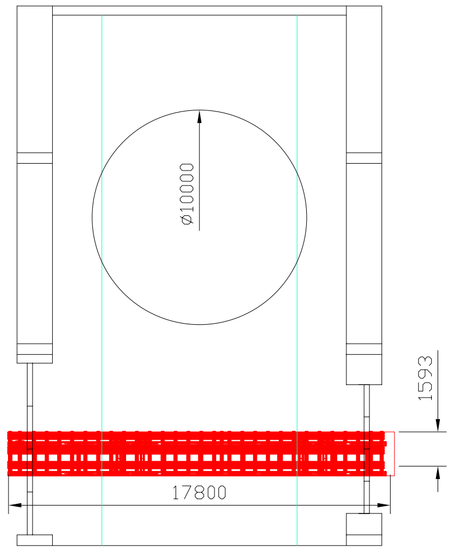

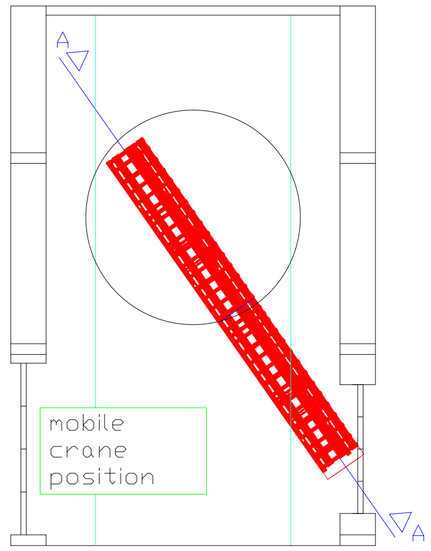

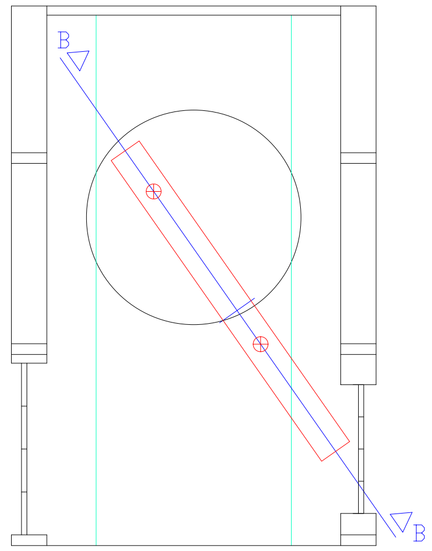

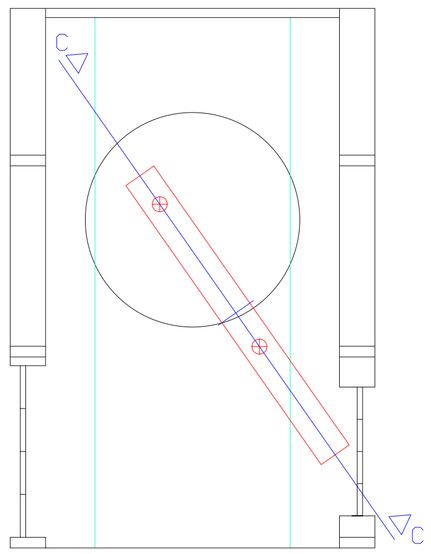

SECTION D-D

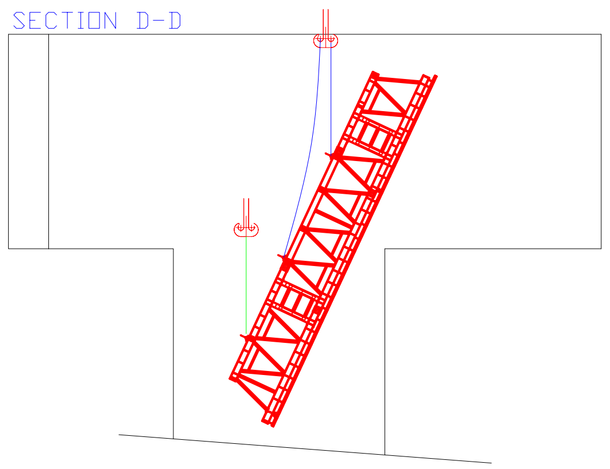

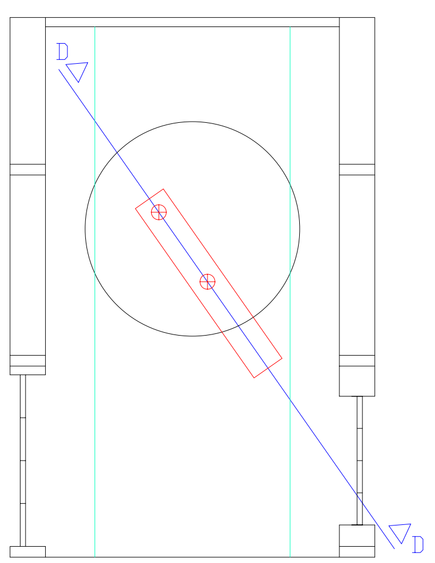

SECTION E-E

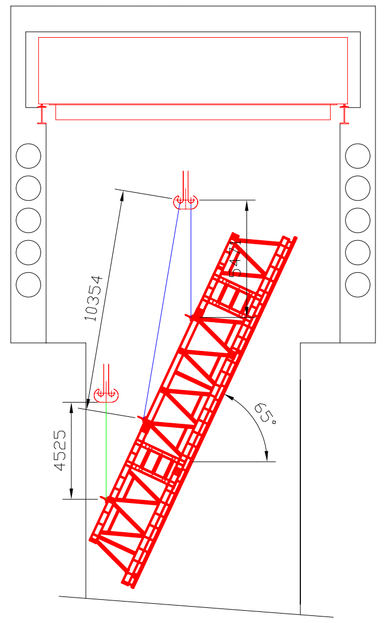

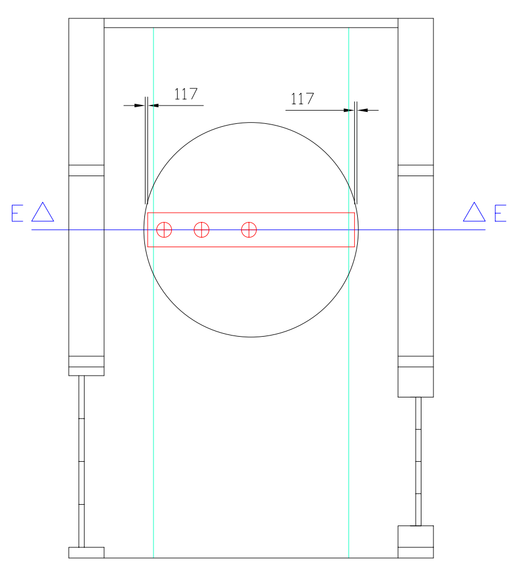

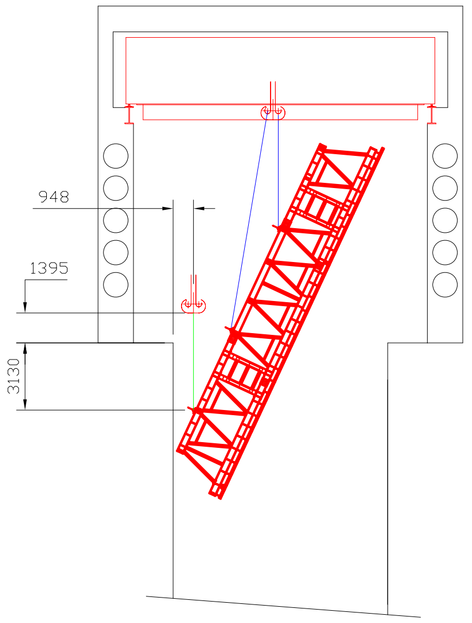

BEAM CHARACTERISTICS:

Dimensions: 18000x2045x2780mm3
Weight: 10tons
Material: Stainless steel

HANDLING DEVICES:

Slings (5.5m, 10m)
Mobile Crane
Lifting rings

GENERAL TOLERANCES / TOLERANCES GENERALES	DIMENSION	< 6	> 6	> 30	> 120	> 315	> 1000	> 2000
	USINAGE MOYEN/MEDIUM MACHINING	± 0.1	± 0.2	± 0.3	± 0.5	± 0.8	± 1.2	± 2
	MECANO. SOUDURE/WELDED STRUCTURE	± 0.5	± 1	± 2	± 3	± 5	± 7	± 10

DESSIN, RUGOSITE, TOLERANCES SELON NORMES ISO
DRAWING, RUGOSITY, TOLERANCES ACCORDING TO ISO STANDARDS

PROJECTION

ORGANISATION EUROPEENNE POUR LA RECHERCHE NUCLEAIRE
EUROPEAN ORGANIZATION FOR NUCLEAR RESEARCH
GENEVE

Ce dessin ne peut être utilisé à des fins commerciales sans autorisation écrite
This drawing may not be used for commercial purposes without written authorization

IND.	DATE	NOM/NAME	ZONE	MODIFICATION
A	2006-07-11			beam dimensions

OT/IT truss handling
Handling in SX 2885
Manutention du treillis du OT/IT
Manutention au SX 2885

ECHELLE / SCALE 1:200

DES/DRA.		2005-09-20
CONTROLLED		
RELEASED		
APPROVED		

LHEN1 ___ ONI ___ 012

REMPLACE/REPLACES

NON VALABLE POUR EXECUTION
NOT VALID FOR EXECUTION

QAC: –

LHBII___0012 | SIZE 1 | IND. A